



A59.4951 Microscope Accessories 12.5 Inches Lcd Digital Microscope Camera 1080p

Our Product Introduction

for more products please visit us on cnoec.com

Basic Information

- Place of Origin: China
- Brand Name: CNOEC, OPTO-EDU
- Certification: CE, Rohs
- Model Number: A59.4951
- Minimum Order Quantity: 1 pc
- Price: FOB \$1~1000, Depend on Order Quantity
- Packaging Details: Carton Packing, For Export Transportation
- Delivery Time: 5~20 Days
- Payment Terms: T/T, West Union, Paypal
- Supply Ability: 5000 pcs/ Month



Product Specification

- Resolution: 2.0M
- Expose Mode: Rolling Shutter
- Maximum Resolution: 1920 X 1080 (2,073,600 Pixels)
- Sensor Optical Format: 1/2.8" (6.058mm(H) X 4.415mm(V))
- Pixel Size: 2.9μm X 2.9μm
- Dynamic Range: 128dB
- SNR(Signal Noise Ratio): 30dB
- Spectral Characteristics: 380~650nm
- Exposure Capability: Real-time Auto, Single Auto, Manual Adjustment
- White Balance: Real-time Auto, Single Auto, Manual Adjust RGB Separately
- Highlight: microscope accessory, parts of the microscope



More Images



Product Description

LCD Digital Microscope Camera, 12.5", 1080p HDMI, 2.0M A59.4951

A59.4951 is a professional imaging system of camera integrated with displayer, which uses high-performance CMOS on image capture and adopts high-resolution fog LCD to truly restore images. With multi-angle and multi-joint rotation, the display is designed flexibly and easy to use, which meets the requirement of fast and efficient. Equipped with wired controller to facilitate operation.

As a standard configuration, it provides built-in and efficient image capture software, which is convenient for you to use quickly.

- ◆ HDMI 2.0MP HD Preview And Snapshot
- ◆ Remarkable Color Reduction
- ◆ High Dynamic Range And High Sensitivity SONY CMOS
- ◆ Standard C-mount, External Camera System
- ◆ Equipped With 12.5" HD 1080P Displayer
- ◆ The Displayer Rotatable At Multiple Angles And Joints

Real time image preview, one button snapshot, continuous take photo and record.

Parameter adjustment such as exposure, white balance, resolution, etc.

Customize cross lines.

HDR wide dynamic of antiglare.

Freeze, sharpness adjustment, cross lines, record mode, language settings, formatting, color adjustment, spectrum Image quality adjustment, fast preview, image rotation, etc.

A59.4951 Integrated Screen Camera, Professional Imaging System	
Camera specifications	
Image Sensor	SONY CMOS IMX291 Super Wide Dynamic CMOS Sensor
Expose Mode	Rolling Shutter
Maximum Resolution	1920 x 1080 (2,073,600 pixels)
Sensor Optical Format	1/2.8" (6.058mm(H) x 4.415mm(V))
Pixel Size	2.9μm x 2.9μm
Dynamic Range	128dB
SNR(Signal Noise Ratio)	30dB
Spectral Characteristics	380~650nm
Exposure Capability	Real-time Auto, Single Auto, Manual Adjustment
White Balance	Real-time Auto, Single Auto, Manual Adjust RGB Separately
Display (preview) Resolution	HDMI: 1920X1080P60
Record Format	Snapshot Picture Format: JPG Resolution: 1920x1080 Record Video Format: MOV Resolution: 1920X1080P30, 1280x720P60
Record Route	TF Card (Maximum Support 128G, Support Hot Plug)
Camera Interface Parameter	
Camera Interface	C mount Thread (1 x 1/32)
Image Output Interface	HDMI TYPE C (Mini HDMI)
Monitor Parameters	
Size	12.5"
Type	a-Si TFT-LCD/IPS
Resolution	1920x1080
Color Display	16.7M
Brightness	300 Nit
Contrast	800:1
Visible Angle	170° Horizontal & Vertical
Power Supply	Adapter: Input: AC100~240V/50~60Hz Output: DC12V/5A/60W Monitor: USB-A-Output: DC5V/2A x 3
Image Input Interface	HDMI1, HDMI2

OPTO-EDU

LCD Digital Microscope HD Camera 12.5"

A59.4951

- ↔ HDMI 2.0MP HD Preview And Snapshot
- 🎨 Remarkable Color Reduction
- 👁️ High Dynamic Range And High Sensitivity SONY CMOS
- 🔍 Standard C-mount, External Camera System
- 🖥️ Equipped With 12.5" HD 1080P Displayer
- 🔄 The Displayer Rotatable At Multiple Angles And Joints



PRODUCT DISPLAY

A59.4951



Complete Solution - One Device Can Realize Multiple Functions;
Equipped With 12.5 Inches Full HD Displayer



Equipped With Wired Controller To Facilitate Operation



- Connect The Camera And Display With The Appropriate Length Of Wire To Output The Image
- With Multi-angle And Multi-joint Rotation, The Display Is Designed Flexibly And Easy To Use, Which Meets The Requirement Of Fast And Efficient Inspection
- Use 1/2.8 Inch SONY CMOS IMX291 Ultra Wide Dynamic Ultra Low Illumination Sensor Camera, Excellent Color Reduction

Snapshot/Record

Zoom out /down




Menu/ return

Zoom in /up

Mode/confirm



Drawing Display:

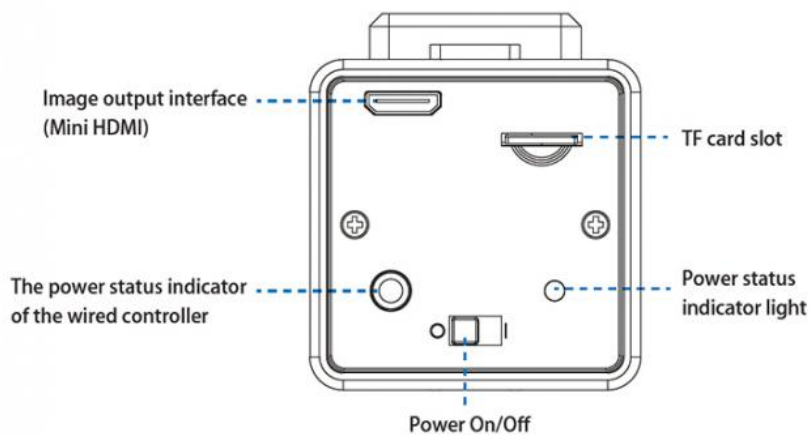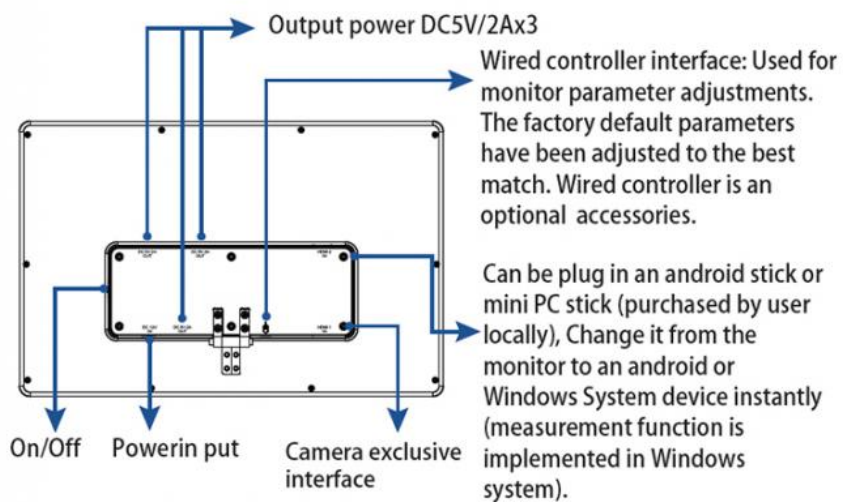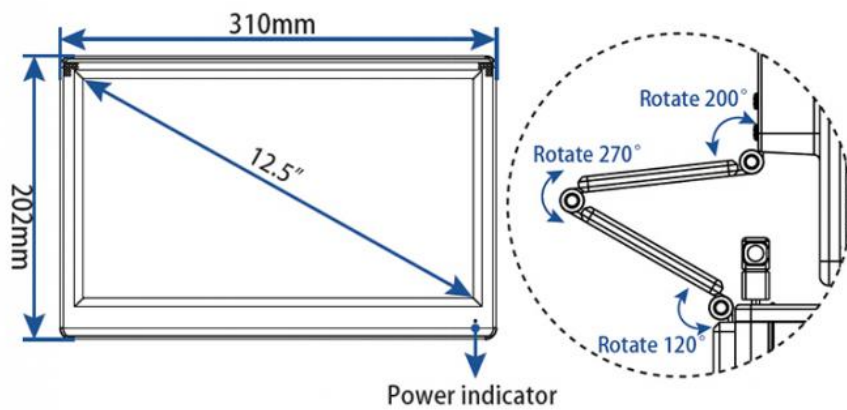

Opto-Edu (Beijing) Co., Ltd.

☎ 0086 13911110627

✉ sale@optoedu.com

🌐 cnoec.com

F-1501 Wanda Plaza, No. 18 Shijingshan Road, Beijing 100043, China